

**CL-24**  
VHF-TV LOG-PERIODIC ANTENNA  
8.2 dBd gain  
54–72 MHz (Channels 2–4)



The Kathrein Scala Division CL-24 is a ruggedly built, horizontally polarized log-periodic antenna, designed for professional VHF-TV transmit and receive applications.

Like all Kathrein Scala Division antennas, the CL-24 is made of the finest materials using state of the art electrical and mechanical designs, resulting in superior performance and long service life.

The CL-24 may be used stand alone or in arrays for higher gain, increased side-lobe suppression, or custom azimuth patterns.

**Specifications:**


Frequency range	54–72 MHz (broadband)
Gain	8.2 dBd
Impedance	50 or 75 ohms
VSWR	< 1.5:1
Polarization	Horizontal
Front-to-back ratio	>25 dB
Maximum input power	250 watts, type "N" 75 ohm connector 500 watts, type "N" 50 ohm connector
Azimuth pattern	54 degrees (half-power)
Elevation pattern	76 degrees (half-power)
Connector	N female (50Ω or 75Ω)
Wind survival rating*	120 mph (200 kph)
Mounting	For masts of 2.375 inches (60 mm) OD.

**CL-24/HCM** Center-mount


**CL-24/HRM** Rear-mount

See reverse for order information.

	CL-24/HCM	CL-24/HRM
Weight	40 lb (18.2 kg)	50 lb (22.7 kg)
Dimensions	112 x 77.9 x 9.9 inches (2845 x 1954 x 252 mm)	112 x 103.9 x 41 inches (2845 x 2640 x 1042 mm)
Equivalent flat plate area	5.28 ft <sup>2</sup> (0.491 m <sup>2</sup> )	6.23 ft <sup>2</sup> (0.579 m <sup>2</sup> )
Shipping dimensions	98 x 10 x 6 inches (2490 x 254 x 153 mm)	115 x 5 x 6 inches (2921 x 127 x 153 mm)
Shipping weight	45 lb (19.1 kg)	85 lb (38.6 kg)

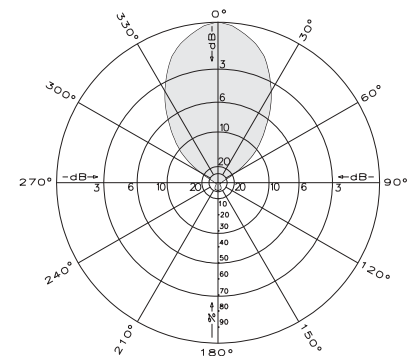

**Azimuth pattern (E-plane)**

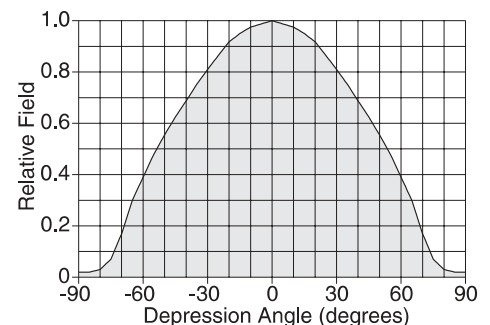


**Elevation pattern (H-plane)**

\* Mechanical design is based on environmental conditions as stipulated in EIA-222-F (June 1996) and/or ETS 300 019-1-4 which include the static mechanical load imposed on an antenna by wind at maximum velocity. See the Engineering Section of the catalog for further details.



10277-C

**CL-24**  
VHF-TV LOG-PERIODIC ANTENNA  
8.2 dBd gain  
54–72 MHz (Channels 2–4)

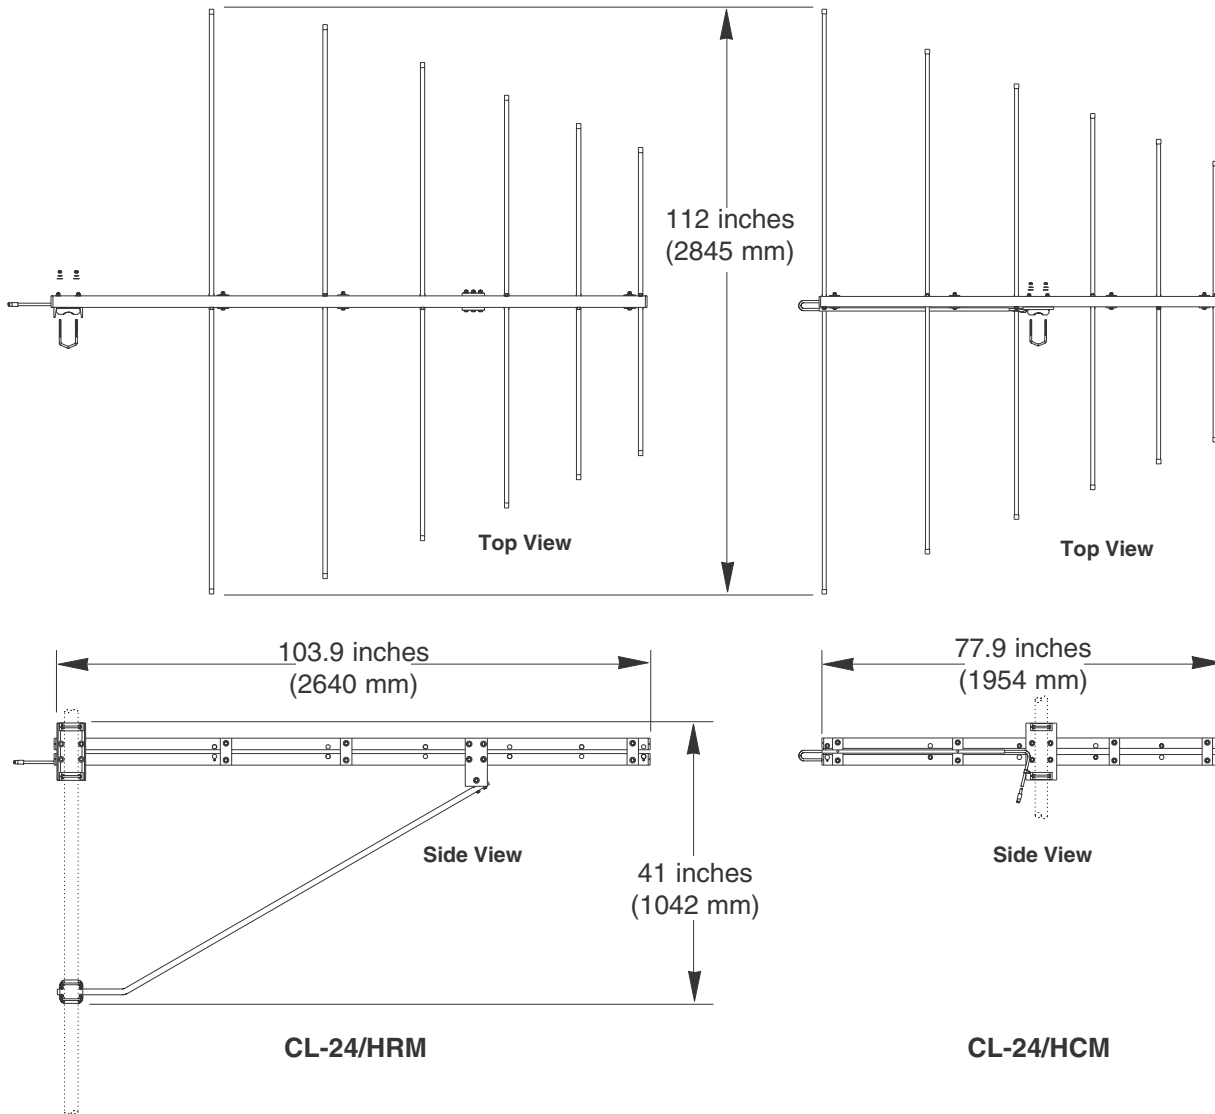

**Order Information:**

Model	Description
CL-24/HCM/50N	Antenna with 50 $\Omega$ N connector
CL-24/HCM/75N	Antenna with 75 $\Omega$ N connector
CL-24/HRM/50N	Antenna with 50 $\Omega$ N connector
CL-24/HRM/75N	Antenna with 75 $\Omega$ N connector

All specifications are subject to change without notice