

- Designed for lightning protection of control cables used with the Kathrein RCU (Remote Control Unit)
- Includes grounding cable with attached lug, one roll of butyl rubber tape, one roll of PVC tape, and hardware.


Specifications:

Maximum lightning current	>20 kA (pulse 10/350 μ sec)
Protection class	IP 68
Grounding	Via stranded grounding wire 6 gauge, length 24 inches, 2-hole lug terminal ($\frac{3}{8}$ in. lug) attached
Nominal size	$\frac{1}{4}$ or $\frac{3}{8}$ inch
Bonding conductor jacket material type	PE
Grounding strap material	Copper
Waterproofing method	Butyl rubber and PVC tape



Note: The grounding kit is only suitable for use with Kathrein power supply and signal cables:

840 10407	840 10413
840 10408	840 10414
840 10409	840 10415
840 10410	840 10453
840 10432	840 10454
840 10411	840 10455
840 10412	840 10451
840 10433	840 10452

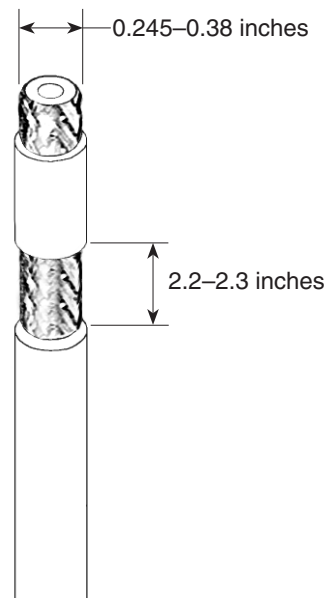

Order Information:

Model	Description
GC-1	Grounding kit



All specifications are subject to change without notice.
The latest specifications are available at www.kathrein-scala.com.