

Kathrein's omnidirectional antennas for wireless, paging, SMR and mobile applications are extremely robust, using the finest fiberglass, brass, and aluminum. Applicable mounting hardware is fabricated from stainless steel. Many models may be mounted inverted. Higher gain antennas can be provided with downtilt, as well.


- Wireless
- Paging
- SMR
- Land Mobile
- ISM

Specifications:


Frequency range	890–960 MHz
Gain	5 dBi
Impedance	50 ohms
VSWR	< 1.5:1
Intermodulation (2x5w)	IM3: <-150dBc
Polarization	Vertical
Maximum input power	250 watts (at 50°C)
H-plane beamwidth	Omni
E-plane beamwidth	30 degrees (half power)
Connector	N female
Weight	2.0 lb (0.9 kg)
Height	28.1 inches (715 mm)
Radome diameter	0.83 inches (21 mm)
Wind load	at 93 mph (150kph)
Side	5 lbf (20 N)
Wind survival rating	120 mph (200 kph)
Shipping dimensions	32.5 x 4.4 x 3.8 inches (825 x 112 x 97 mm)
Shipping weight	5.0 lb (2.3 kg)
Mounting	For masts of 0.8 to 2.1 inch (20 to 54 mm) OD.

See reverse for order information.

*Mechanical design is based on environmental conditions as stipulated in TIA-222-G-2 (December 2009) and/or ETS 300 019-1-4 which include the static mechanical load imposed on an antenna by wind at maximum velocity. See the Engineering Section of the catalog for further details.




H-plane
Horizontal pattern
V-polarization



E-plane
Vertical pattern
V-polarization




10046-K
936.376/j

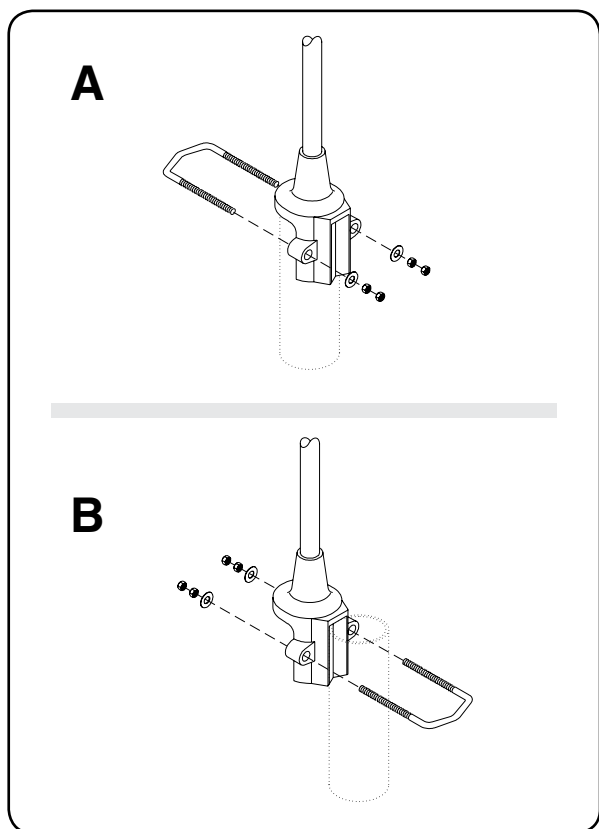

Mounting Options:

	Description
A	Mounting for 1.6 to 2.1 inch (40 to 54 mm) OD mast
B	Mounting for 0.8 to 2.1 inch (20 to 54 mm) OD mast

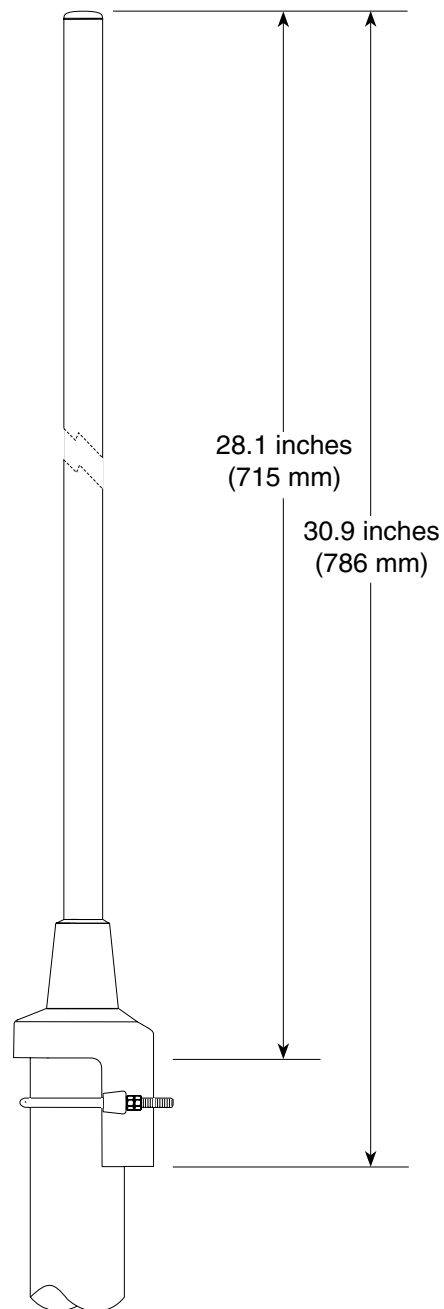

Order Information:

Model	Description
K7515641	Antenna with N connector 0° electrical downtilt

All specifications are subject to change without notice. The latest specifications are available at www.kathrein-scala.com.

Kathrein Inc., Scala Division Post Office Box 4580 Medford, OR 97501 (USA) Phone: (541) 779-6500 Fax: (541) 779-3991
Email: communications@kathrein.com Internet: www.kathrein-scala.com