

CA2-FM

FM DIPOLE REFLECTOR ANTENNA

4 dBd gain
88 to 108 MHz

The Scala CA2-FM is a ruggedly built dipole reflector antenna, designed for professional FM transmit and receive applications.

Like all Scala antennas, the CA2-FM is made of the finest materials resulting in superior performance and long service life.

The CA2-FM may be used stand-alone or in stacked arrays for higher gain, increased side-lobe suppression, or custom azimuth patterns.




Specifications:

Frequency range	Any specified FM channel 88 to 108 MHz
Gain	4 dBd
Impedance	50 or 75 ohms
VSWR	< 1.5:1
Polarization	Horizontal
Front-to-back ratio	>11 dB
Maximum input power	250 watts
Azimuth pattern	72 degrees (half-power)
Elevation pattern	80 degrees (half-power)
Connector	50Ω or 75Ω N female
Weight	5.7 lb (2.6 kg)
Dimensions	35.3 x 68.9 inches maximum (897 x 1750 mm)
Equivalent flat plate area	1.19 ft ² (0.11 m ²) maximum
Wind survival rating*	120 mph (194 kph)
Shipping dimensions	70 x 6 x 5 inches maximum (1778 x 152 x 127mm)
Shipping weight	10 lb (4.5 kg) maximum
Mounting	For masts of 2.375 inches (60 mm) OD.


* Mechanical design is based on environmental conditions as stipulated in EIA-222-F (June 1996) and/or ETS 300 019-1-4 which include the static mechanical load imposed on an antenna by wind at maximum velocity. See the Engineering Section of the catalog for further details.

Order Information:

Contact Scala Customer Service for detailed order information.

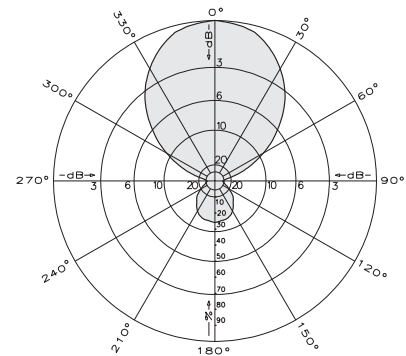

Azimuth pattern (E-plane - typical)

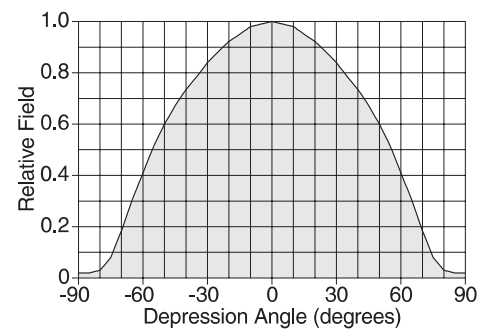


Elevation pattern (H-plane)



10747-A

CA2-FM
FM DIPOLE REFLECTOR ANTENNA
4 dBd gain
88 to 108 MHz

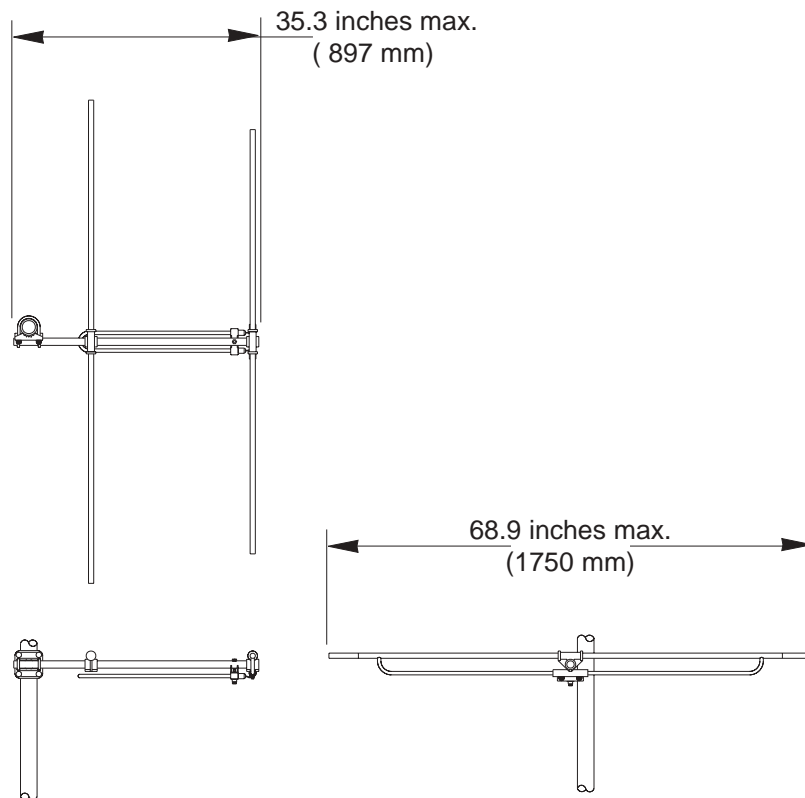

Order Information:

Contact Scala Customer Service for detailed order information.